


## 900V 25A N-Channel Enhancement Mode Power MOSFET

### Description

The AKQA25N90 is an N-Channel enhancement mode power MOSFET which using proprietary planar stripe and DMOS technology.

This MOSFET has low static on-resistance and high avalanche energy strength. This device provide excellent performance for high voltage power supplies or pulse circuits.

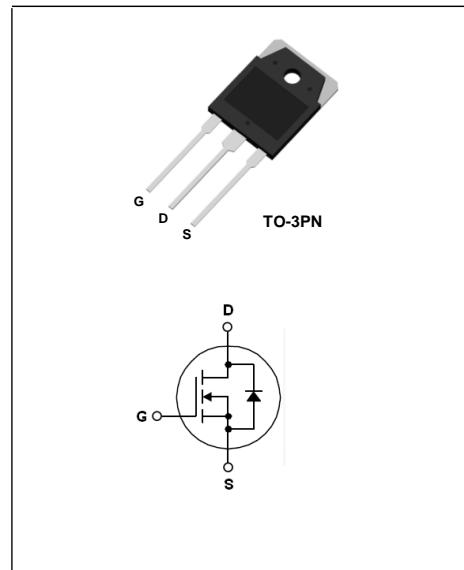

### Features

- Typical on-Resistance:  $R_{DS(on)}=0.34\Omega$
- High Blocking Voltage
- 100% Avalanche Test
- Good Stability and Uniformity with High  $E_{AS}$

### Applications

- High Voltage Power Supplies
- Capacitor Discharge Applications
- Pulse Circuits

### Absolute Maximum Ratings @ $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
$V_{DSS}$	Drain to Source Voltage		900	V
$V_{GSS}$	Gate to Source Voltage		$\pm 30$	V
$I_D$	Drain Current	$T_C=25^\circ C$	25	A
		$T_C=100^\circ C$	16	A
$I_{DM}$	Pulsed Drain Current	(Note1)	100	A
$P_D$	Maximum Power Dissipation	$T_C=25^\circ C$	500	W
	Derate above $25^\circ C$		4	W/ $^\circ C$
$E_{AS}$	Single Pulsed Avalanche Energy	(Note 2)	1800	mJ
$T_J$	Operating Junction Temperature Range		-50~+150	$^\circ C$
$T_{STG}$	Storage Temperature Range		-50~+150	$^\circ C$

### Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.25	$^\circ C/W$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	$^\circ C/W$

**Electrical Characteristics** @ $T_C=25\text{ }^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$BV_{DSS}$	Drain to Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	-	950	-	V
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	3.2	3.9	4.6	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=12.5\text{A}$	-	0.34	-	$\Omega$
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=V_{DSS}, V_{GS}=0\text{V}$	-	-	1	$\mu\text{A}$
$I_{GSS}$	Gate to Source Leakage Current	$V_{GS}=V_{GSS}, V_{DS}=0\text{V}$	-	-	$\pm 100$	nA

**D-S Diode Characteristics and Maximum Rating** @ $T_C=25\text{ }^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_S$	Maximum Drain to Source Diode Forward Current		-	-	25	A
$V_{SD}$	Drain-Source Diode Forward Voltage	$V_{GS}=0\text{V}, I_S=25\text{A}$	-	0.89	1.1	V
$t_{rr}$	Reverse Recovery Time	$V_{GS}=0\text{V}, I_S=25\text{A},$ $dI/dt=-100\text{A}/\mu\text{s}$	-	-	400	ns
$Q_{rr}$	Reverse Recovery Charge		-	-	7	$\mu\text{C}$

**Switching Characteristics** @ $T_C=25\text{ }^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on Delay Time	$I_D=25\text{A},$ $V_{DD}=450\text{V},$ $R_G=10\Omega$ (Note 3)	-	25	-	ns
$t_r$	Rising Time		-	15	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	50	-	ns
$t_f$	Falling Time		-	15	-	ns
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=25\text{V},$ $f=1.0\text{MHz}$	-	7600	-	pF
$C_{oss}$	Output Capacitance		-	1250	-	pF
$C_{rss}$	Reverse Transfer Capacitance		-	570	-	pF
$Q_g$	Total Gate Charge	$I_D=25\text{A},$ $V_{DD}=720\text{V}$ $V_{GS}=10\text{V}$ (Note 3)	-	53	-	nC
$Q_{gs}$	Gate to Source Charge		-	12	-	nC
$Q_{gd}$	Gate to Drain Charge		-	21	-	nC

**Note:**

1. Repetitive rating: pulse-width limited by maximum junction temperature
2.  $V_{DD}=100\text{V}, L=10\text{mH}, V_G=10\text{V}, I_D=20\text{A}$
3. Essentially independent of operating temperature typical characteristics

## Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

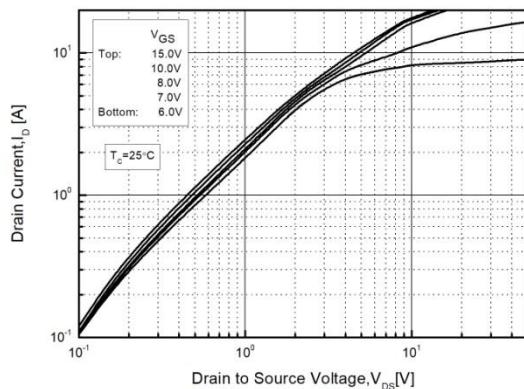


Fig. 3. Static on-Resistance vs.  $I_D$

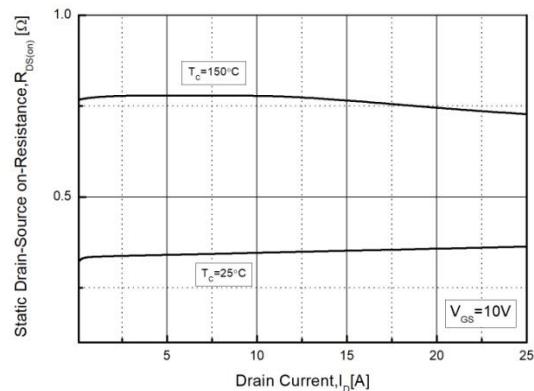


Fig. 5. Capacitance Characteristics

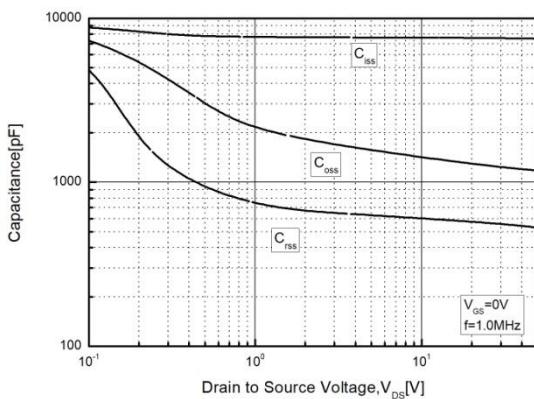


Fig. 2. Typical Transfer Characteristics

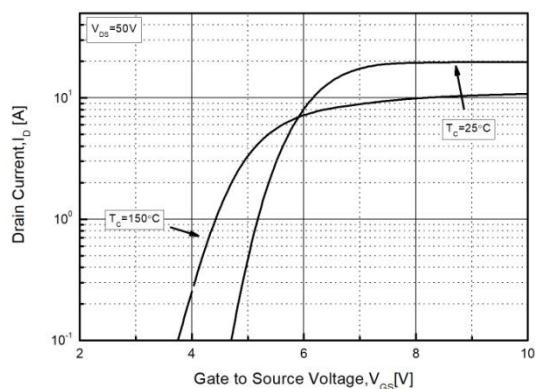


Fig. 4. Body Diode Forward Voltage vs.  $I_{DR}$


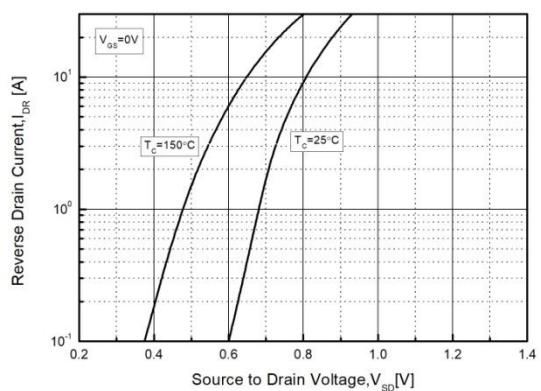


Fig. 6. Gate Charge Characteristics

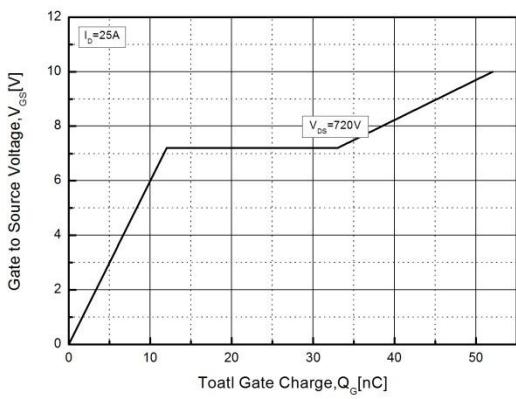

## Typical Performance Characteristics

Fig. 7. Breakdown Voltage vs. Temperature

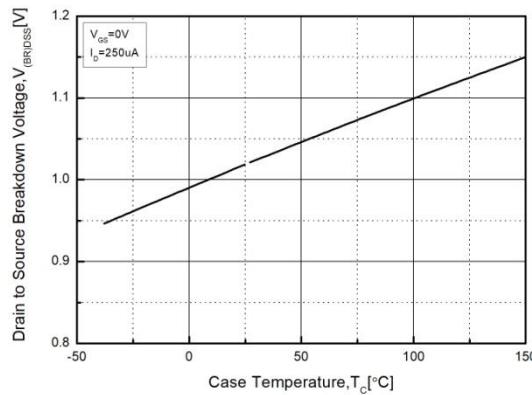


Fig. 8. Static on-Resistance vs. Temperature

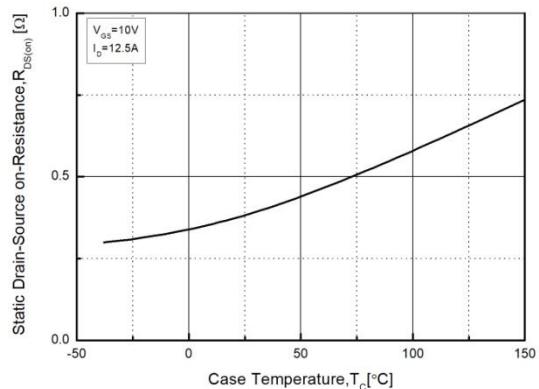


Fig. 9. Safe Operating Area

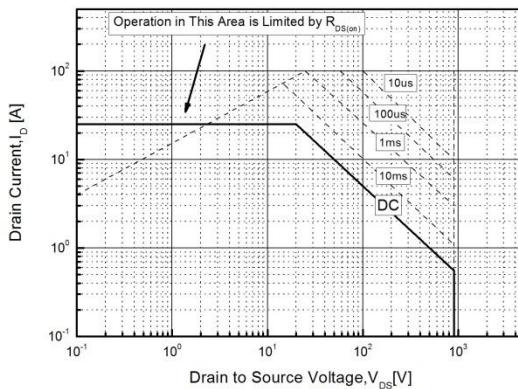


Fig. 10. Maximum Drain Current vs. Temperature


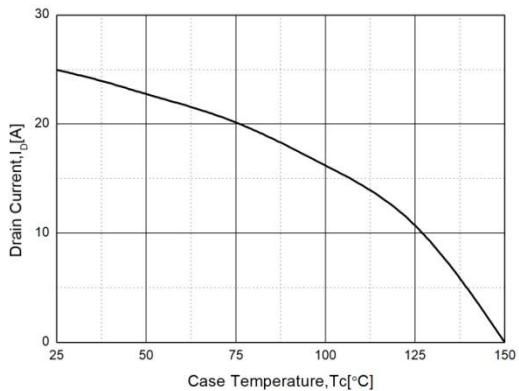


Fig. 11. Transient Thermal Response Curve

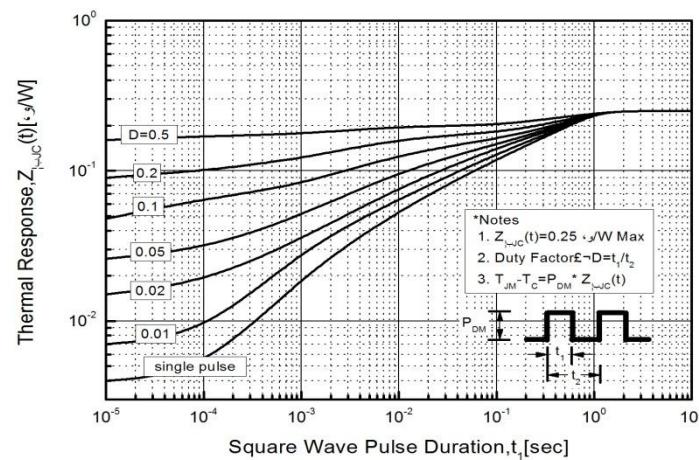

### Package Dimensions

**TO-3PN**

(Dimensions in Millimeters)

