


600V 28A N-Channel Enhancement Mode Power MOSFET

Description

The AKT28N60N is an N-Channel enhancement mode power MOSFET, it has low static on-resistance and high avalanche energy strength. This device provide excellent switching performance for UPS,DC-DC converters and AC-DC power supply.

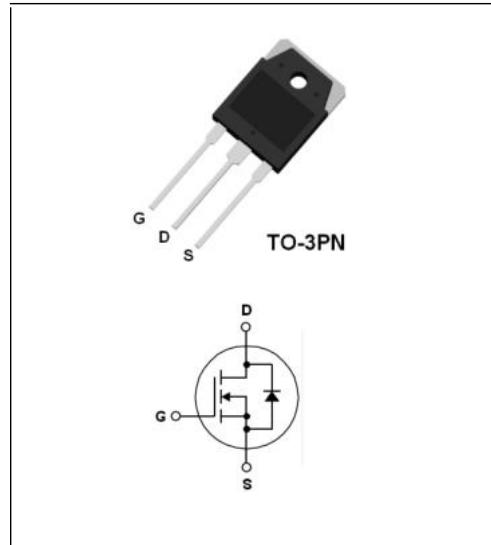

Features

- Low on-Resistance: $R_{DS(on)}=0.125\Omega$ (typ.)
- Special Process Technology for high ESD Capability
- 100% Avalanche Test
- Good Stability and Uniformity with High E_{AS}

Applications

- UPS Applications
- DC-DC Converters and AC-DC Power Supply

Absolute Maximum Ratings @ $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{DSS}	Drain to Source Voltage		600	V
V_{GSS}	Gate to Source Voltage		± 30	V
I_D	Drain Current	$T_C=25^\circ C$	28	A
		$T_C=100^\circ C$	18	A
I_{DM}	Pulsed Drain Current	(Note1)	112	A
P_D	Maximum Power Dissipation	$T_C=25^\circ C$	350	W
	Derate above $25^\circ C$		2.8	W/ $^\circ C$
E_{AS}	Single Pulsed Avalanche Energy	(Note 2)	4700	mJ
T_J	Operating Junction Temperature Range		-55~+150	$^\circ C$
T_{STG}	Storage Temperature Range		-55~+150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.36	$^\circ C/W$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	$^\circ C/W$

Electrical Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain to Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	600	-	-	V
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_D=250\mu\text{A}$	3.0	3.9	5.0	V
$R_{\text{DS(on)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$, $I_D=14\text{A}$	-	0.125	-	Ω
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=V_{\text{DSS}}$, $V_{\text{GS}}=0\text{V}$	-	-	1	μA
I_{GSS}	Gate to Source Leakage Current	$V_{\text{GS}}=V_{\text{GSS}}$, $V_{\text{DS}}=0\text{V}$	-	-	± 100	nA

D-S Diode Characteristics and Maximum Rating @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Maximum Drain to Source Diode Forward Current		-	-	28	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$, $I_S=28\text{A}$	-	0.86	1.1	V
t_{rr}	Reverse Recovery Time		-	-	0.6	us
Q_{rr}	Reverse Recovery Charge	$V_{\text{GS}}=0\text{V}$, $I_S=28\text{A}$, $dI/dt=-100\text{A}/\text{us}$	-	7	-	μC

Switching Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$t_{\text{d(on)}}$	Turn-on Delay Time	$I_D=28\text{A}$, $V_{\text{DD}}=250\text{V}$, $R_G=25\Omega$ (Note 3)	-	110	-	ns
t_r	Rising Time		-	350	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time		-	210	-	ns
t_f	Falling Time		-	210	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=25\text{V}$, $f=1.0\text{MHz}$	-	4500	-	pF
C_{oss}	Output Capacitance		-	650	-	pF
C_{rss}	Reverse Transfer Capacitance		-	60	-	pF
Q_g	Total Gate Charge	$I_D=28\text{A}$, $V_{\text{DS}}=400\text{V}$, $V_{\text{GS}}=10\text{V}$ (Note 3)	-	115	-	nC
Q_{gs}	Gate to Source Charge		-	35	-	nC
Q_{gd}	Gate to Drain Charge		-	50	-	nC

Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. $L=20\text{mH}$, $V_{\text{DD}}=150\text{V}$, $V_G=10\text{V}$, @ $T_C=25^\circ\text{C}$
3. Essentially independent of operating temperature typical characteristics

Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

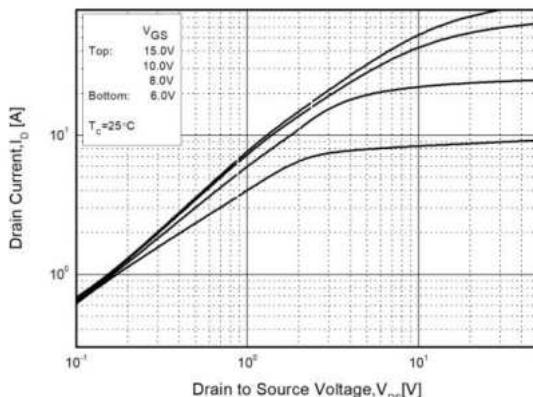


Fig. 3. Static on-Resistance vs. I_D

Fig. 2. Typical Transfer Characteristics

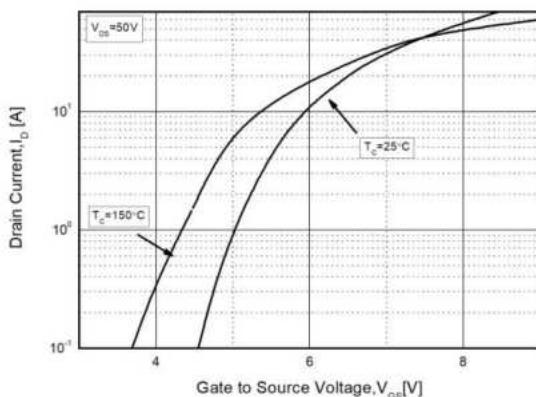


Fig. 4. Body Diode Forward Voltage vs. I_{DR}

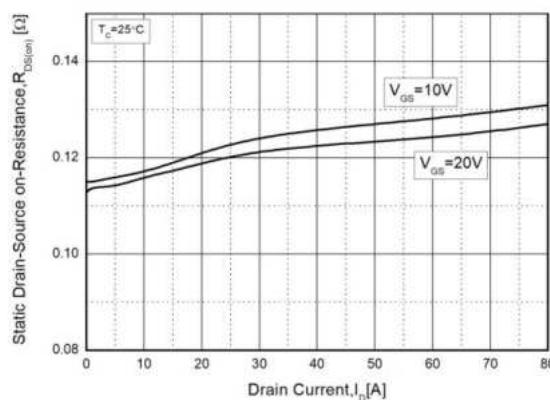


Fig. 5. Capacitance Characteristics



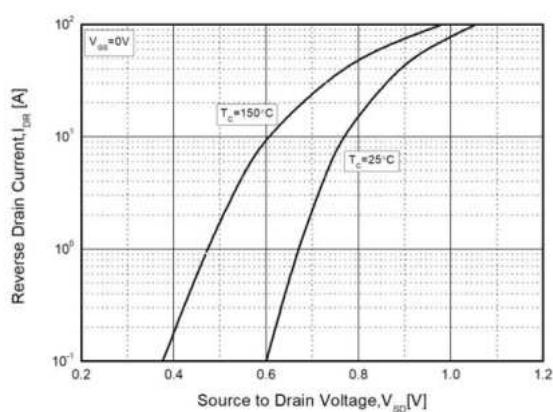


Fig. 6. Gate Charge Characteristics

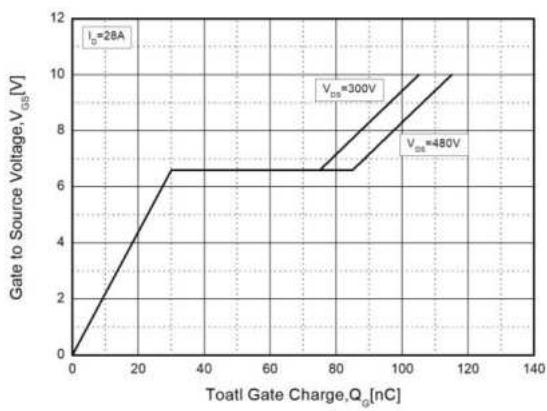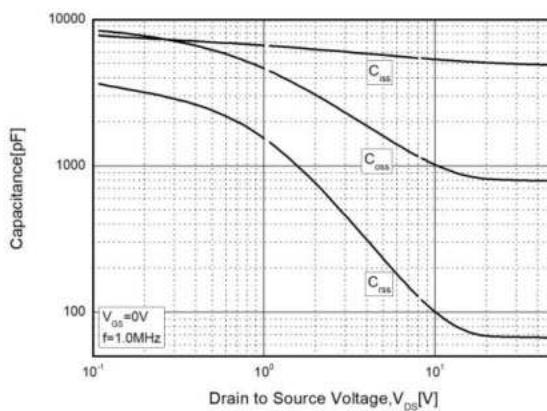

Typical Performance Characteristics

Fig. 7. Breakdown Voltage vs. Temperature

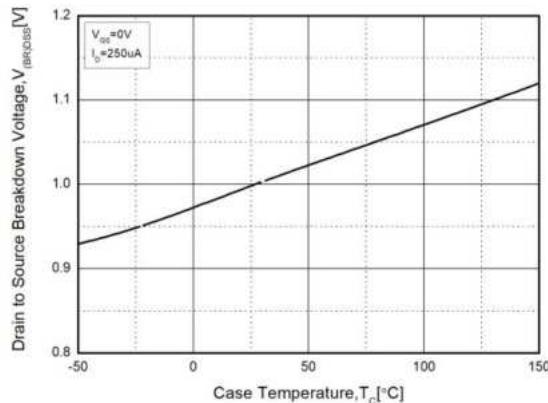


Fig. 8. Static on-Resistance vs. Temperature

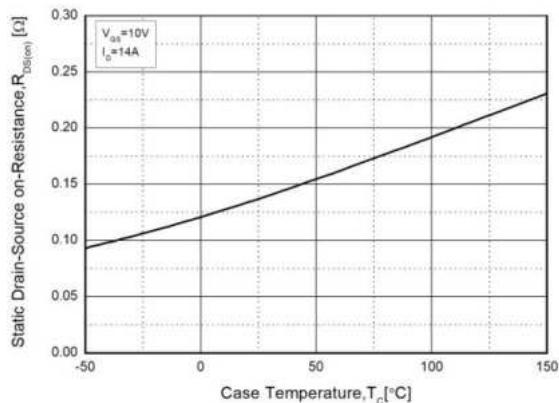


Fig. 9. Maximum Safe Operating Area

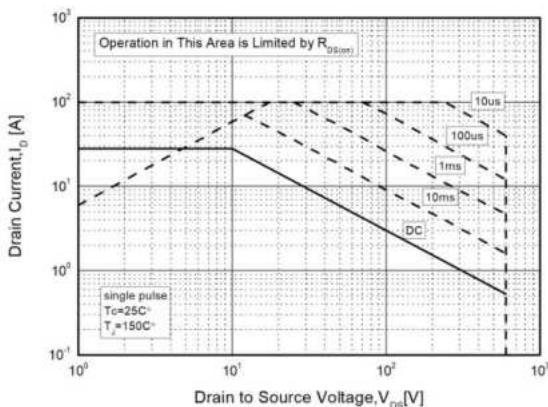


Fig. 10. Maximum Drain Current vs. Temperature


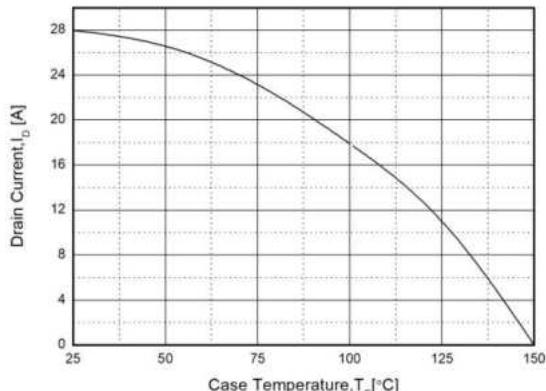


Fig. 11. Transient Thermal Response Curve

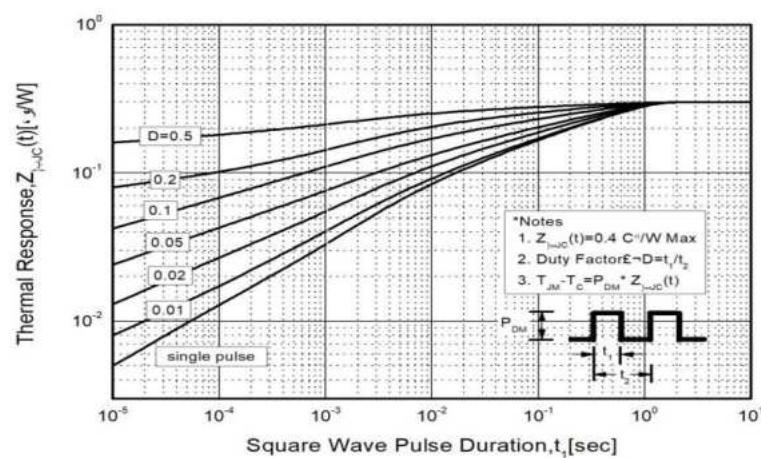

Package Dimensions

TO-3PN

(Dimensions in Millimeters)

