

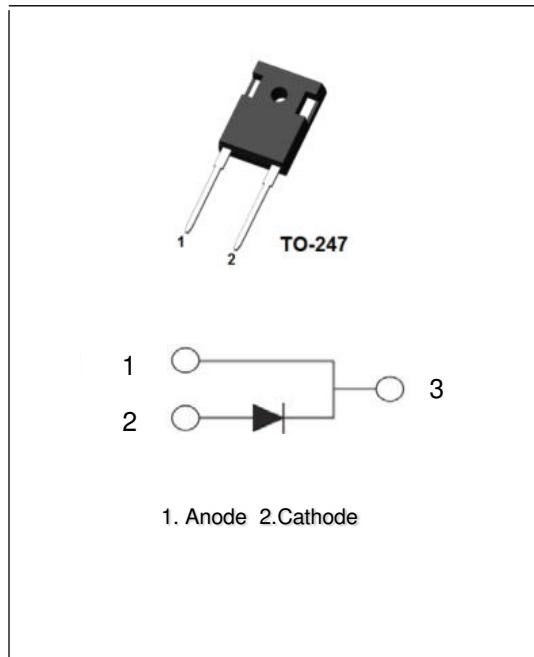
## 80A, 600V Hyperfast Single Diode

### Description

The AKF80H60SH is an hyperfast single diode with low forward voltage drop. This device is designed for Inversion Welder and UPS, It is specially suited for use in Converter & Chopper and industrial applications as SMPS.

### Features

- Hyperfast Soft Recovery:  $t_{rr}=45\text{ns}$  (typ.)
- Typical Forward Voltage:  $V_F=1.80\text{V}$  @  $I_F=80\text{A}$
- Reverse Voltage:  $V_{RRM}=600\text{V}$
- Avalanche Energy Rated



### Applications

- Inversion Welder
- Converter & Chopper
- Rectifiers In Switch Mode Power Supplies

### Absolute Maximum Ratings

per diode at  $T_C=25\text{ }^\circ\text{C}$  unless otherwise noted

Symbol	Parameter		Ratings	Unit
$V_{RRM}$	Peak Repetitive Reverse Voltage		600	V
$V_{RWM}$	Working Peak Reverse Voltage		600	V
$V_R$	DC Blocking Voltage		600	V
$I_{F(AV)}$	Average Rectified Forward Current	per device at $T_C=120\text{ }^\circ\text{C}$	80	A
$I_{FSM}$	Non-repetitive Peak Surge Current		800	A
$T_J$	Operating Junction Temperature Range		-40~+150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-40~+150	$^\circ\text{C}$

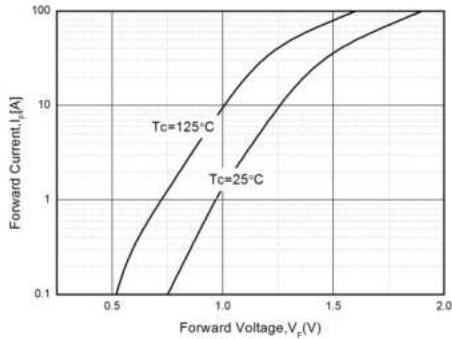
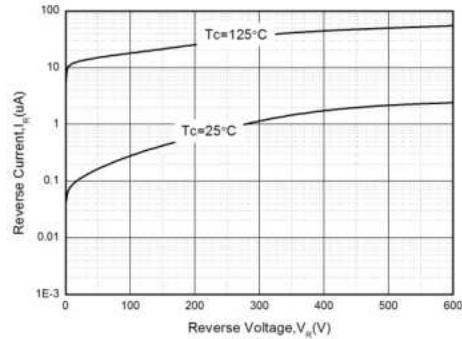
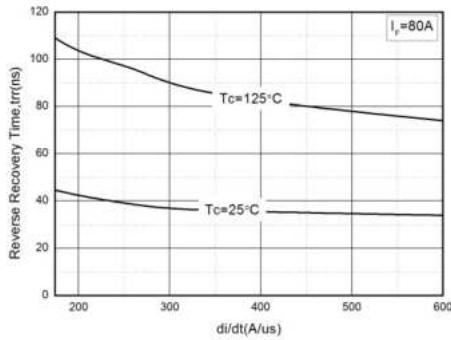
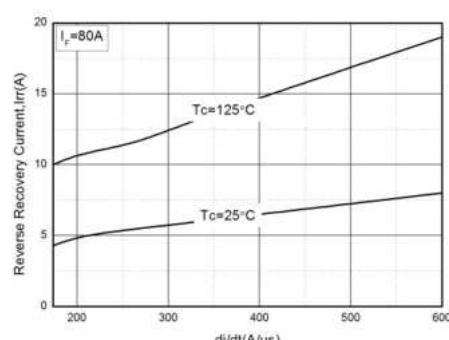
### Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.45	$^\circ\text{C}/\text{W}$

**Electrical Characteristics** per diode @ $T_C=25\text{ }^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage Drop	$I_F=80\text{A}$	-	1.80	2.2	V
		$I_F=80\text{A}, T_C=125\text{ }^\circ\text{C}$	-	-	1.8	V
$I_R$	Reverse Leakage Current	$V_R=600\text{V}$	-	-	10	uA
$t_{rr}$	Reverse Recovery Time	$I_F=80\text{A}, \text{di}/\text{dt}=-170\text{A}/\text{us}$	-	45	-	ns
$W_{AVL}$	Avalanche Energy	$L=5\text{mH}$	250	-	-	mJ

**Typical Performance Characteristics**

 Fig. 1. Typical Characteristics:  $V_F$  vs.  $I_F$ 

 Fig. 2. Typical Characteristics:  $V_R$  vs.  $I_R$ 

 Fig. 3. Typical Reverse Recovery Time vs.  $\text{di}/\text{dt}$ 

 Fig. 4. Typical Reverse Recovery Current vs.  $\text{di}/\text{dt}$ 


**Package Dimensions****TO-247**

(Dimensions in Millimeters)

