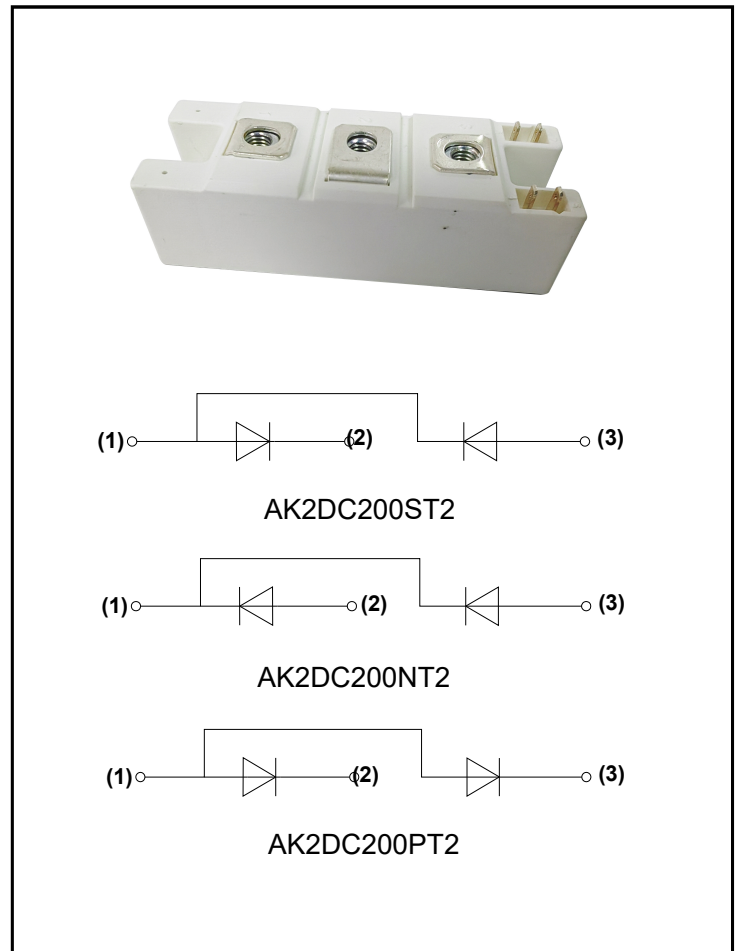


Description

- 1) A package of series of two diodes.
- 2) Heat transfer through alumina ceramic and metal substrate.
- 3) Welding by vacuum welding technology, which provide high reliability.

Typical Application

AC converter, inverter and DC motor.

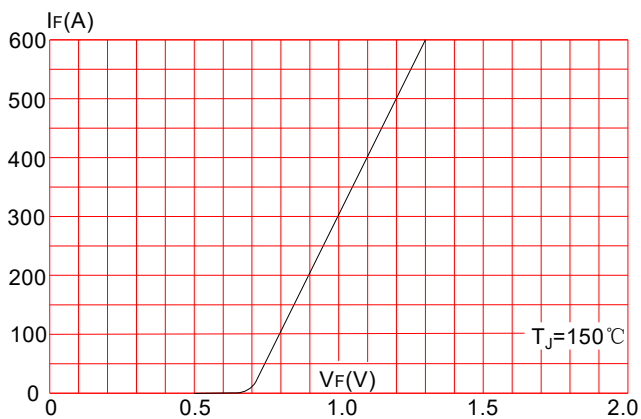
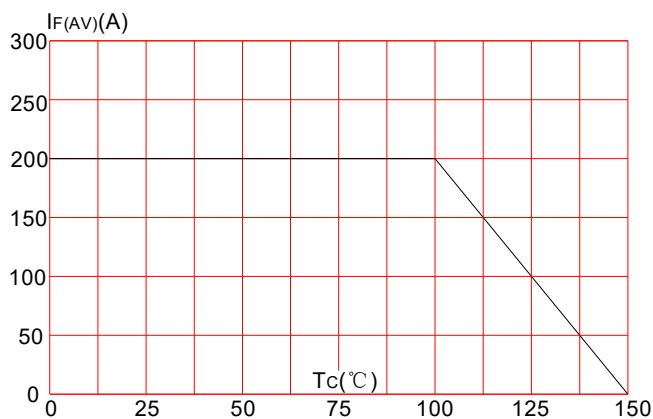
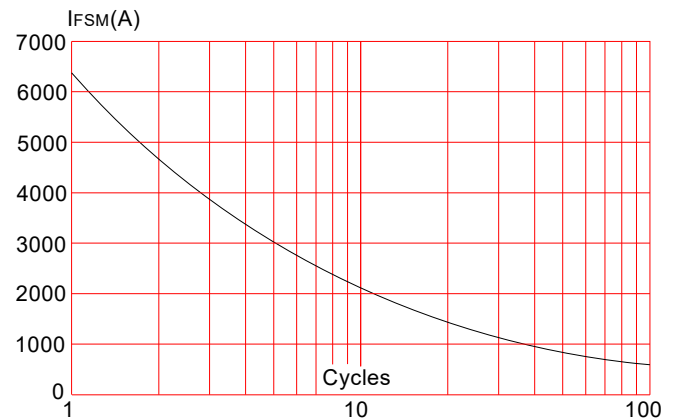
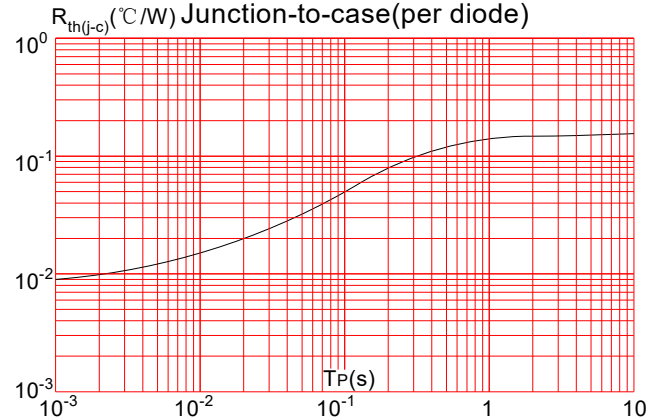


Absolute Maximum Ratings (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}C$)

Parameter	Test Conditions	Symbol	Values				Unit
			12	16	18	20	
Operating junction temperature range		T_j	-40-150				$^{\circ}C$
Storage temperature range		T_{stg}	-40-125				$^{\circ}C$
Repetitive peak reverse voltage	$T_j=25^{\circ}C$	V_{RRM}	1200	1600	1800	2000	V
Non-repetitive peak reverse voltage	$T_j=25^{\circ}C$	V_{RSM}	1300	1700	1900	2100	V
Average on-state current	$T_C=100^{\circ}C$	$I_{F(AV)}$	200				A
Peak on-state surge current	$t_p=10ms, \sin 180^{\circ}$,	I_{FSM}	6300				A
I^2t value for fusing	$T_j=25^{\circ}C$	I^2t	198000				A^2s
Insulation voltage	A.C 50Hz(1s/1min)	V_{ISO}	3600/3000				V

Electrical Characteristics (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}C$)

Parameter	Test Conditions	Symbol	Values	Unit
Peak on-state voltage	$I_F=600A$ $t_P=380\mu s$	V_F	≤ 1.6	V
Threshold voltage	$T_J=150^{\circ}C$	V_{TO}	≤ 0.7	V
Dynamic resistance	$T_J=150^{\circ}C$	R_d	≤ 1.0	m Ω
Repetitive peak reverse current	$V_R=V_{RRM}$ $T_J=25^{\circ}C$	I_{RRM1}	≤ 100	μA
	$T_J=150^{\circ}C$	I_{RRM2}	≤ 60	mA
Thermal resistance	Junction to case	$R_{th(j-c)}$	0.16	$^{\circ}C/W$
	Case to heatsink	$R_{th(c-s)}$	0.12	

Performance Curves
FIG.1: Forward characteristics(per diode)

FIG.3: Forward current vs. case temperature

FIG.2: Peak on-state surge current

FIG.4: Maximum transient thermal impedance


Mechanical Characteristics

Module size	94mm×34.3mm
Module height	30.3mm
Terminal distance of (1)/(2)/(3)	23mm
Mounting torque(M5)	5±15%Nm
Terminal torque(M6)	5±15%Nm
	<p>AK2DC200ST2</p> <p>AK2DC200NT2</p> <p>AK2DC200PT2</p>