

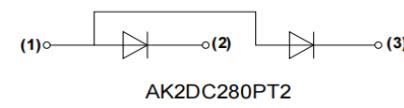

## Diode Module

### Description

- 1) A package of series of two diodes.
- 2) With high thermal conductivity DBC as the insulation.
- 3) Welding by vacuum welding technology, which provide high reliability.

### Typical Application

AC converter, inverter and DC motor.

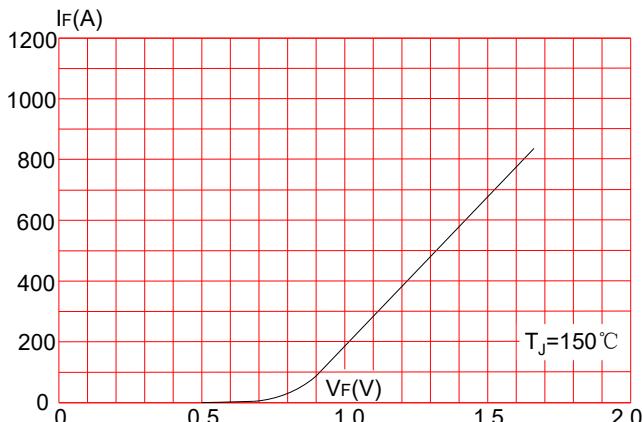
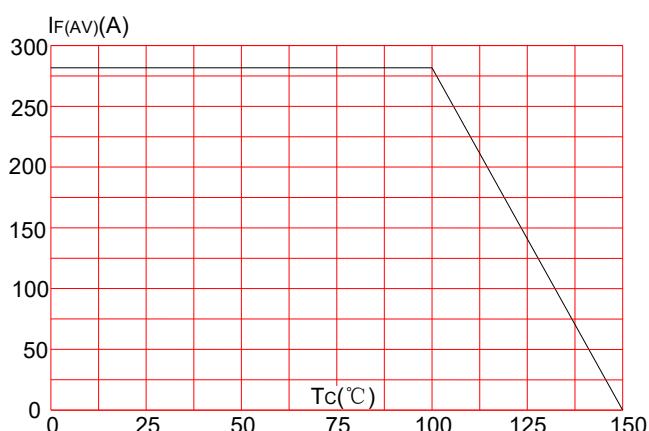
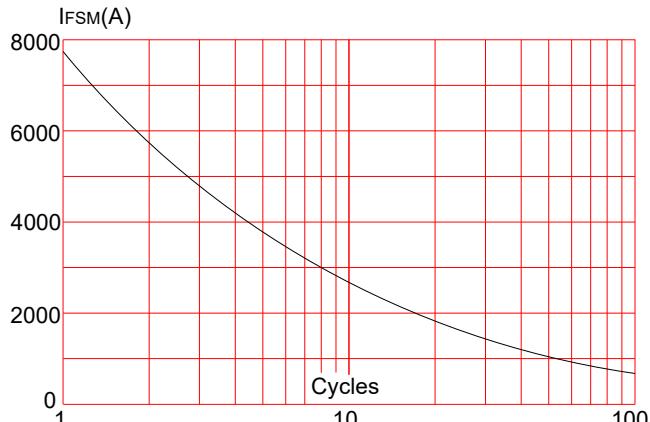
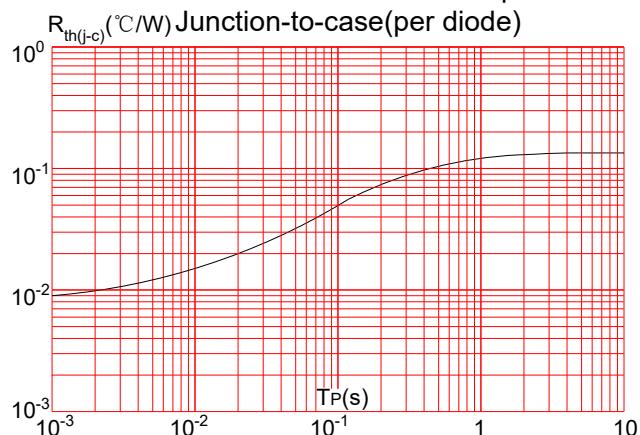


### Absolute Maximum Ratings (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}\text{C}$ )

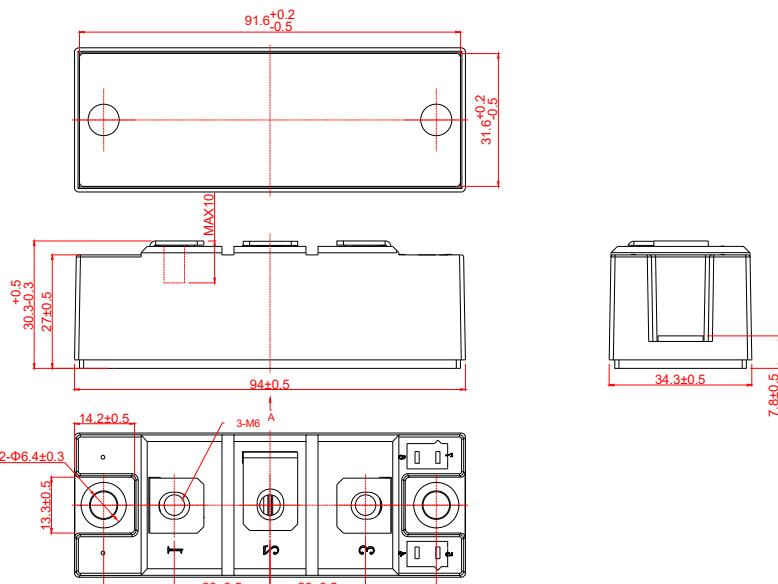



Parameter	Test Conditions	Symbol	Values				Unit
			12	16	18	20	
Operating junction temperature range		$T_j$	-40-150				°C
Storage temperature range		$T_{stg}$	-40-125				°C
Repetitive peak reverse voltage	$T_j=25^{\circ}\text{C}$	$V_{RRM}$	1200	1600	1800	2000	V
Non-repetitive peak reverse voltage	$T_j=25^{\circ}\text{C}$	$V_{RSM}$	1300	1700	1900	2100	V
Average forward current	$T_c=100^{\circ}\text{C}$	$I_{F(AV)}$	280				A
Peak forward surge current	$t_p=10\text{ms}, \sin 180^{\circ}$ ,	$I_{FSM}$	7840				A
$I^2t$ value for fusing	$T_j=25^{\circ}\text{C}$	$I^2t$	307000				$\text{A}^2\text{s}$
Insulation voltage	A.C 50Hz(1s/1min)	$V_{ISO}$	3600/3000				V

**Electrical Characteristics** (Packaged into modules, unless otherwise specified,  $T_{CASE}=25^{\circ}\text{C}$ )

Parameter	Test Conditions	Symbol	Values	Unit
Peak forward voltage	$I_F=840\text{A}$ , $t_P=380\mu\text{s}$	$V_{FM}$	$\leq 1.6$	V
Threshold voltage	$T_j=150^{\circ}\text{C}$	$V_{TO}$	$\leq 0.78$	V
Dynamic resistance	$T_j=150^{\circ}\text{C}$	$R_d$	$\leq 1.05$	$\text{m}\Omega$
Repetitive peak reverse current	$V_R=V_{RRM}$ $T_j = 25^{\circ}\text{C}$ $T_j = 150^{\circ}\text{C}$	$I_{RRM1}$ $I_{RRM2}$	$\leq 100$ $\leq 90$	$\mu\text{A}$ mA
Thermal resistance(Per chip)	Junction to case Case to heatsink	$R_{th(j-c)}$ $R_{th(c-s)}$	0.13 0.05	$^{\circ}\text{C/W}$

**Performance Curves**
**FIG.1:** Forward characteristics(per diode)

**FIG.3:** Forward current vs. case temperature

**FIG.2:** Peak on-state surge current

**FIG.4:** Maximum transient thermal impedance


**Mechanical Characteristics**

Module size	94mm×34.3mm
Module height	30.3mm
Terminal distance of (1) /(2) /(3)	23mm
Mounting torque(M5)	5±15%Nm
Terminal torque(M6)	5±15%Nm
 <b>T2</b>	 <b>AK2DC280ST2</b>  <b>AK2DC280NT2</b>  <b>AK2DC280PT2</b>